




Solvents

DIL X 100

Technical Data Sheet

Reviewed: 06.06.2015

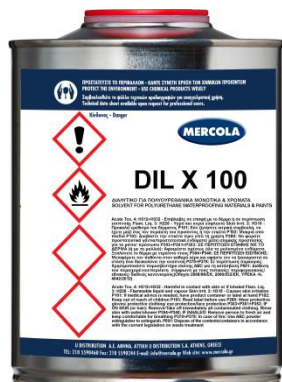

HEALTH AND SAFETY INFORMATION



Acute Tox. 4: H312+H332 - Harmful in contact with skin or if inhaled
 Flam. Liq. 3: H226 - Flammable liquid and vapour
 Skin Irrit. 2: H315 - Causes skin irritation
 P101: If medical advice is needed, have product container or label at hand
 P102: Keep out of reach of children
 P103: Read label before use
 P280: Wear protective gloves/protective clothing/ eye protection/face protection
 P303+P361+P353: IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower
 P304+P340: IF INHALED: Remove person to fresh air and keep comfortable for breathing
 P370+P378: In case of fire: Use ABC powder extinguisher to extinguish.
 P501: Dispose of the contents/containers in accordance with the current legislation on waste treatment

DESCRIPTION

DIL X 100 is a solvent used for diluting - thinning polyurethane coatings.

APPLICATIONS

- Thinner for the brushable polyurethane waterproofing membrane PU FLEX 1000 especially when applied by spray gun
- Cleaning equipment after the application of PU FLEX 1000

TECHNICAL CHARACTERISTICS

Type: Mixture of solvents

Consistency: Liquid

Colour: Transparent

Smell: Characteristic of solvents

Relative density: 0,87 ± 0,02 gr/cm³ 25 °C

Flammability: Flammable

STORAGE

Products should be stored in a dry and cool place at a temperature of 5°C -35°C, away from sources of ignition. Protect from humidity and direct sunlight.

SHELF LIFE

12 months from the production date in the above mentioned storage conditions. The product should remain in the original unopened packaging bearing the manufacturer's batch number.

PACKAGING

4Lt, 16Lt

PACKAGING	CODE	BARCODE
4Lt	6040	5204094060406
16Lt	6042	5204094060420

The directives contained in this technical data sheet are the result of our long experience from real life applications and the research testing of our research and development laboratory and have been submitted in good faith. Because of the diversity of the materials and substrates and the great number of possible applications, which are beyond our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary experiments. We are liable only for our products for being free from faults and of consistent quality. Users are responsible for complying with local legislation and for obtaining any required approvals or authorizations. The present edition of this technical datasheet automatically cancels any previous ones concerning the same product.



Evochem®

EVOCHEM S.A.

Tzavardella place 13341, Fyli, Attica, Greece

Tel.: 210 5590460, 210 5590155 Fax: 210 5590244

E-mail: info@evochem.gr Website: www.evochem.gr

